



Cardinal iMDU

Range of intelligent Mains Distribution Units



INNOVATE

COLLABORATE

DELIVER

The Cardinal iMDU range



Cardinal with dual input



Cardinal with single input

This intelligent range of iMDUs features an intuitive web based user interface, SNMP MIB based control and monitoring, e-mail messaging and alerts. The units have an error log to record events, GPIO handling and an optional temperature and humidity sensor to monitor conditions in the equipment rack.

Single and dual input versions

Single input and dual input versions are available. The dual input version enables main and back up power sources to be connected to a single Cardinal unit. Switching to the back up input supply is automatic on power fail of the main source. The changeover system is designed to allow non phase coherent inputs to be switched.

Automatic power shedding

If a back up power supply is selected, it may be necessary to switch off non-critical equipment by shedding a number of MDU outputs. Power shedding is configured for automatic operation in the MDU configuration page.

High inrush current protection

Both single and dual input versions are designed for use with equipment that has modern switch mode PSU's that can exhibit high inrush currents. Individually switched outputs are rated to 60A inrush and the dual input changeover version has an inrush limiting circuit that restricts the current at switch on to 40A.

Sequential power on/off

All outlets are individually switched enabling the user to control and set sequential switching, to prevent an excessive current surge on start-up and an orderly power-down when shedding outputs.

Network interface

The dB Cardinal intelligent mains distribution unit provides fully featured web and SNMP interfaces giving easy access to sophisticated remote control and configuration facilities.

On loss of mains input large capacitors sustain the microcontroller for approximately ten seconds. This is long enough to record the fault and send SNMP traps to alert the management system of the loss.

Email alerts

The Cardinal range can be configured to provide email alerts for various conditions including; loss of input mains power, blown fuses and output status changing (i.e. relay on or off) moving outside predefined thresholds.

Logging

As well as error logging the MDU records five days of the peak and minimum values of the following:

- Input voltage per input
- Temperature (if sensor option selected)
- Humidity (if sensor option selected)

Fail safe

As standard the MDU outputs will switch off in the event of failure of the internal control system. Ordering the fail safe option enables the outputs to remain on if the internal control system fails and the unit will revert to a conventional MDU.

IP Reset

An optional controller reset button can be added which enables the iMDU internal control system to be reset without interrupting any of the MDU outputs


Temperature and humidity sensing

An optional remote temperature and humidity sensor can be added for monitoring the temperature and humidity at any position within the equipment bay.

General purpose inputs


Each MDU includes 16 general purpose inputs for connection of alarms from other equipment. These alarms can be reported in the same way as those for the MDU.

Cardinal web interface

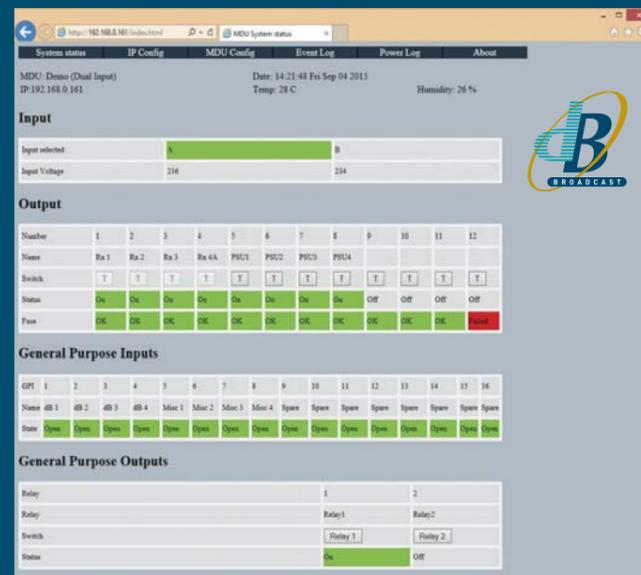


System status

This page allows the status of the MDU to be determined at a glance. It also allows control of the relays, providing they haven't been locked.

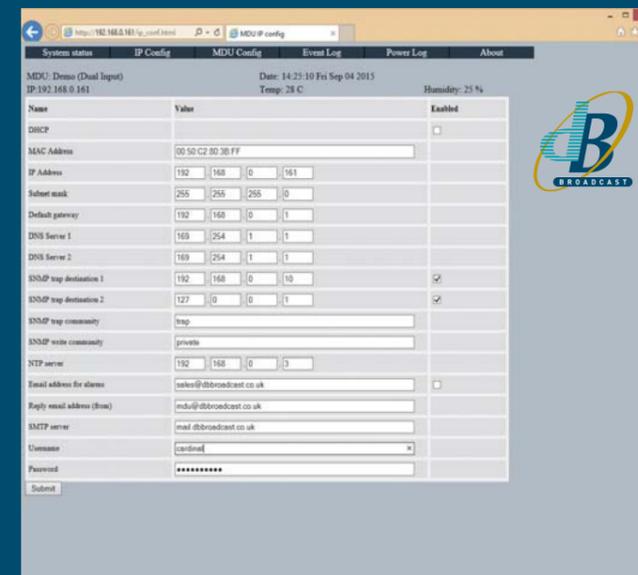

IP configuration

The IP configuration page is used to configure the network interfaces including the IP address, NTP, 2 trap destinations and the email address for alarms.

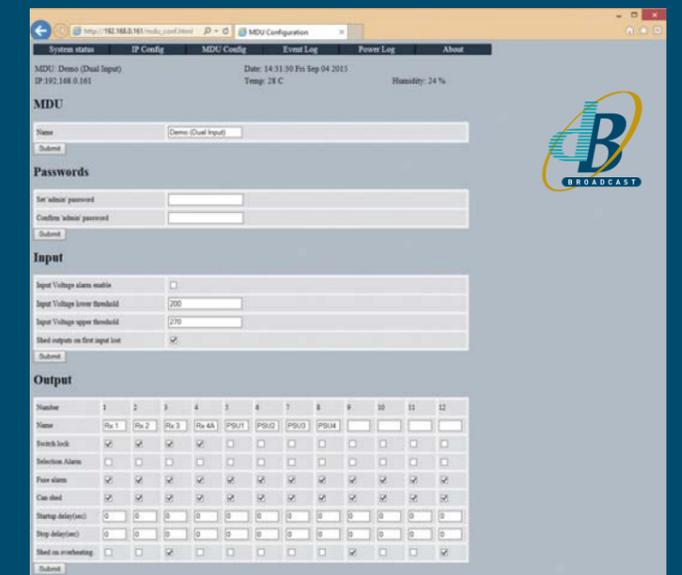

MDU configuration

The input and output parameters such as names and startup sequences are configured on this page. In addition the MDU configuration page is used to set the input voltage used to determine whether to trigger alarms, sent as emails or SNMP traps.






Intelligent iMDU

The Cardinal range of intelligent mains distribution units provide 12 separately controlled outputs, SNMP, web based user interface and e-mail messaging, all in 1RU.

With a choice of single input or dual input changeover versions, inrush current protection and optional temperature & humidity sensor, the Cardinal iMDU provides a comprehensive solution for remote control and management of power distribution in an equipment rack.



Technical specifications:

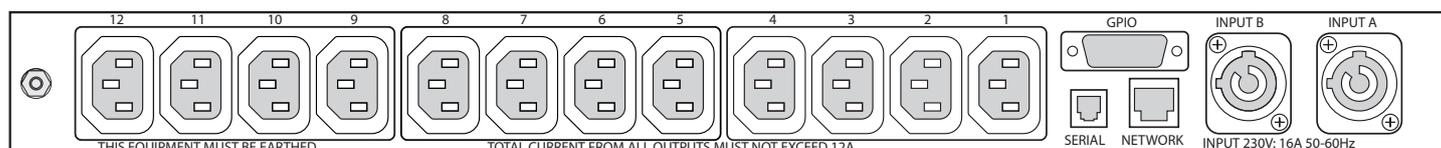

Inputs

Connector: 1 or 2 Neutrik Powercon inlets (depending on model type)
 Input voltage: 230V +/- 10%
 LEDs: Single I/P; Supply LED (green)
 Dual I/P; Supply Active / Available LEDs per I/P (green)

Outputs

Connector: 12 x IEC sockets on the rear panel
 Individual fuse rating: 6A per output
 Total load: Up to 12A at 230V
 LEDs: 2 per output for "on/off" and "fuse blown"

Inrush Current Protection

Output: Up to 60A max per output
 Input: Up to 200A at switch on

Temp & Humidity Sensor

Temp range: -20 to +80 degrees
 Temp accuracy: +/- 2 degrees
 Humidity range: 5 to 95%
 Humidity accuracy: 5%

Physical

Height: 1RU bay mounted unit
 Width: 483mm (standard 19 inch rack)
 Depth: 380mm (including tie bar)
 Switch: Front panel switch is also a thermal over-current circuit breaker
 Tiebar: At the rear for cable retention
 Weight: 2.9kg (single input version)

Environmental

Operational temp: 5 to 40 deg C, non condensing
 Operational humidity: Up to 85% relative humidity

Control/monitoring

Network: Ethernet RJ45 for SNMP interface and web configuration and monitoring via browser
 Serial: RS232 via 6 way Modular Jack
 GPIO: 27 way high density 'D' type. 16 inputs and 2 dry contact outputs
 LEDs: Network Activity and Link (green)

Ordering information:

iMDU12A-S

Cardinal intelligent MDU with single input and 12 outputs, SNMP and sequential turning on/off of outputs

iMDU12A-D

Cardinal intelligent MDU with dual inputs and 12 outputs, SNMP and sequential turning on/off of outputs

Options — factory fit:

- F Failsafe option. Outputs remain on if controller fails or is reset. Includes inrush current limiter.
- H Humidity and temperature sensor, integral
- R Controller reset (recessed button on front panel)

Options — other:

- iMDU12-O-H Humidity and temperature sensor, external, requires iMDU12-O-C-3
- iMDU12-O-C-3 Cable for sensor, serial screened, length 3m (custom cable length available up to 5m)
- iMDU12-O-G Switch guard
- iMDU12-O-W2 Extended warranty from 1 to 2 years
- iMDU12-O-W3 Extended warranty from 1 to 3 years

dB Broadcast Ltd

Kestrel House, Sedgeway Business Park, Witchford, Ely, Cambs CB6 2HY United Kingdom
 T +44 (0)1353 661117 E sales@dbbroadcast.co.uk W www.dbbroadcast.co.uk

